


NMF-4IS- M4C-BK -2/4/8/12/16/24

NIKOMAX - , 50/125 , OM4,
/ , (A)-HF,

NMF-4IS-xxxM4C-BK / ,

ISO/IEC 11801 OM4.

(A)-HF.

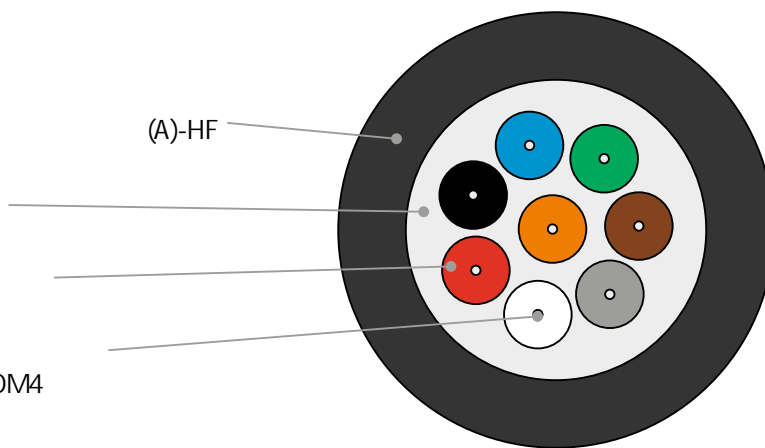

MM 50/125 OM4

NMF-4IS-008M4C-BK

8 / 50/125, OM4, ()-HF,

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Cyan	Dark Blue	Dark Orange	Dark Green	Dark Brown	Dark Grey	Dark White	Dark Red	Dark Black	Dark Yellow	Dark Purple	Dark Pink	Dark Cyan

NIKOMAX NMF-4IS-008M4C-BK 8xMULTI MODE 50/125 ISO/IEC 11801 OM4 Hr(A)-HF YYYYYxxxM
YYYYY- , xxx -

2000 .

	NMF-4IS-xxxM4C-BK					
	2	4	8	12	16	24
	50/125 (Multi Mode)					
	ISO/IEC 11801 OM4					
	900 ± 25					
	(A)-HF					
	/					
	4,0 ± 0,2	4,9 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2
	/					
	15,0	18,0	27,0	36,0	55,0	65,0
	10 Ø					
	440			660		
	100 /c					
	-40 +70 °C.			0 +70 °C.		
	-40 +70 °C.					
(),	450x400	600x400		650x400	800x600	
	- 5 . 15 -			NIKOMAX		

	850	1300
	2,3	0,6

	15	15	37,5	37,5
	2	100	100	100
	850	1300	850	1300
	1,0	1,0	0,5	0,5

	-			3	
NMF-4IS-002M4C-BK	2	MM 50/125	(A)-HF	0,08	34
NMF-4IS-004M4C-BK	4	MM 50/125	(A)-HF	0,14	46
NMF-4IS-008M4C-BK	8	MM 50/125	(A)-HF	0,14	56
NMF-4IS-012M4C-BK	12	MM 50/125	(A)-HF	0,17	64
NMF-4IS-016M4C-BK	16	MM 50/125	(A)-HF	0,34	125
NMF-4IS-024M4C-BK	24	MM 50/125	(A)-HF	0,34	150