


NMF-9IS- MBC-AQ -2/4/8/12/16/24

NIKOMAX - , 50/125 , OMB,  
/ , (A)-HF, —

NMF-9IS-xxxMBC-AQ /  
ISO/IEC 11801 OMB.

(A)-HF.

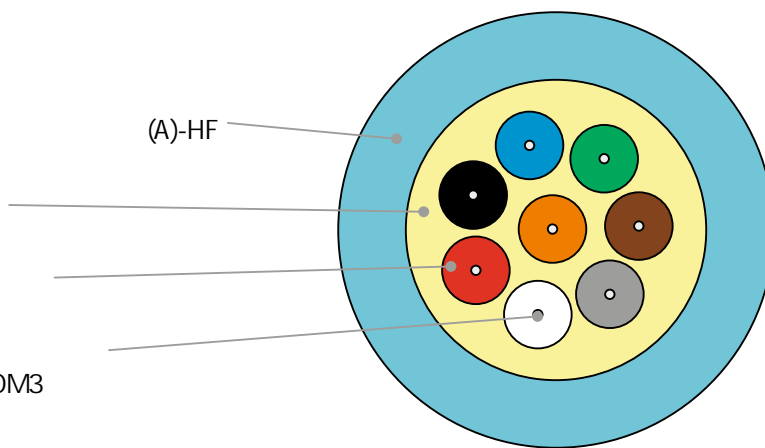

MM 50/125 OM3

NMF-9IS-008MBC-AQ  
8 / 50/125, OMB,  
( )-HF,

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Cyan	Dark Blue	Dark Orange	Dark Green	Dark Brown	Dark Grey	Dark White	Dark Red	Dark Black	Dark Yellow	Dark Purple	Dark Pink	Dark Cyan

NIKOMAX NMF-9IS-008MBC-AQ 8xMULTI MODE 50/125ISO/IEC11801 OM3Hr(A)-HF YYYYYxxxM  
YYYYY- , xxx -

2000 .

	NMF-9IS-xxxM3C-AQ					
	2	4	8	12	16	24
	50/125 (Multi Mode)					
	ISO/IEC 11801 OM3					
	900 ± 25					
	(A)-HF					
	/					
	4,0 ± 0,2	4,9 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2
	/					
	15,0	18,0	27,0	36,0	55,0	65,0
	10 Ø					
	440			660		
	100 /c					
	-40 +70 °C.			0 +70 °C.		
	-40 +70 °C.					
( ),	450x400	600x400		650x400	800x600	
	- 15 . 25 -		NIKOMAX			

	850	1300
	2,3	0,6

	15	15	37,5	37,5
	2	100	100	100
	850	1300	850	1300
	1,0	1,0	0,5	0,5

	-			3	
NMF-9IS-002M3C-AQ	2	MM 50/125	(A)-HF	0,08	34
NMF-9IS-004M3C-AQ	4	MM 50/125	(A)-HF	0,14	46
NMF-9IS-008M3C-AQ	8	MM 50/125	(A)-HF	0,14	56
NMF-9IS-012M3C-AQ	12	MM 50/125	(A)-HF	0,17	64
NMF-9IS-016M3C-AQ	16	MM 50/125	(A)-HF	0,34	125
NMF-9IS-024M3C-AQ	24	MM 50/125	(A)-HF	0,34	150