

NMF-2IS- M3A-AQ -2/4/8/12/16/24


NIKOMAX

50/125

OM3,

NMF-2IS-xxxM3A-AQ

ISO/IEC 11801 OM3.

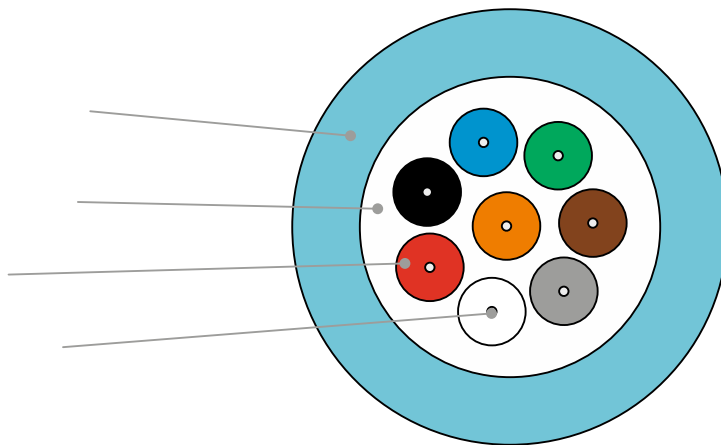

MM 50/125 OM3

NMF-2IS-008M3A-AQ

8

50/125,

OM3,

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Cyan	Dark Blue	Dark Orange	Dark Green	Dark Brown	Dark Grey	White	Red	Black	Yellow	Purple	Pink	Cyan

NIKOMAX NMF-2IS-008M3A-AQ 8xMULTI MODE 50/125ISO/IEC11801 OM3PVC YYYYY-xxxM  
YYYYY- , xxx -

2000 .

	NMF-2IS-xxxM3A-AQ					
	2	4	8	12	16	24
	50/125 (Multi Mode)					
	ISO/IEC 11801 OM3					
	900 ± 25					
	-					
	-					
	4,0 ± 0,2	4,9 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2
	-					
	15,0	18,0	27,0	36,0	55,0	65,0
	10 Ø					
	440			660		
	100 /c					
	-20 +70 °C.			0 +70 °C.		
	-20 +70 °C.					
( ),	450x400	600x400	650x400	800x600		
	1					

	850	1300
	2,3	0,6

	15	15	37,5	37,5
	2	100	100	100
	850	1300	850	1300
	1,0	1,0	0,5	0,5

	-				
				3	
NMF-2IS-002M3A-AQ	2	MM 50/125	-	0,08	34
NMF-2IS-004M3A-AQ	4	MM 50/125	-	0,14	46
NMF-2IS-008M3A-AQ	8	MM 50/125	-	0,14	56
NMF-2IS-012M3A-AQ	12	MM 50/125	-	0,17	64
NMF-2IS-016M3A-AQ	16	MM 50/125	-	0,34	125
NMF-2IS-024M3A-AQ	24	MM 50/125	-	0,34	150