

NMF-2ZS-xxxA1C-BK — 4/8/16/24

NIKOMAX
(A)-HF -40

9/125

G. 652.D & G. 657.A1,

FTTx.


NMF-2ZS-xxxA1C-BK

ITU-T G. 652.D & G. 657.A1.

(FRP)

(A)-HF.

20

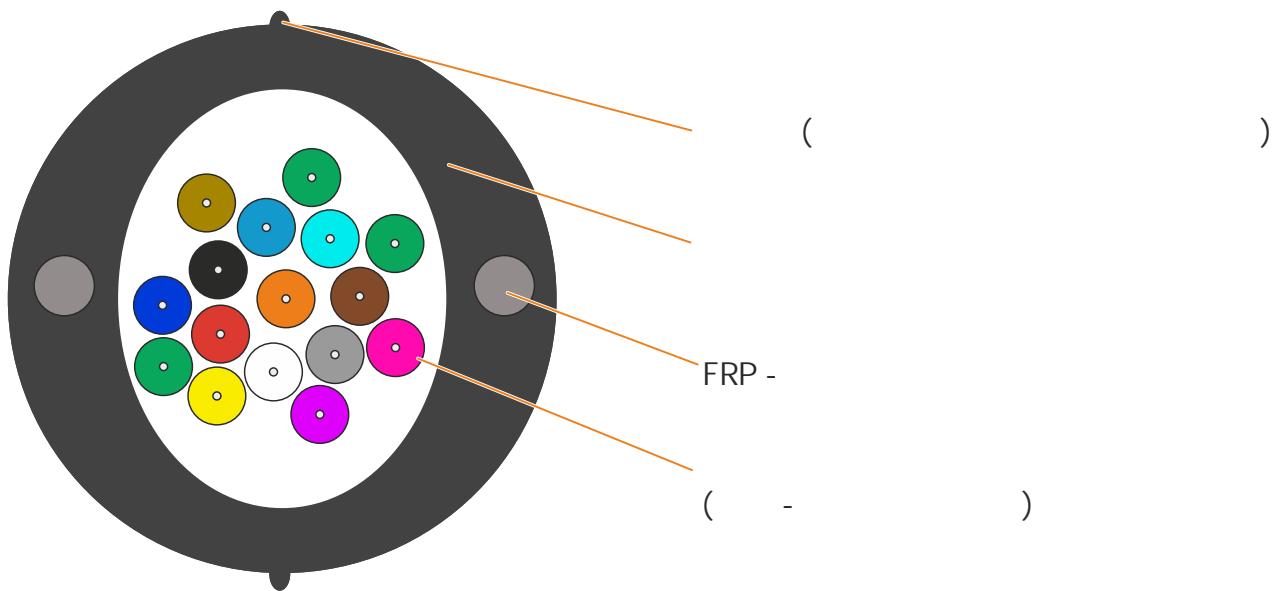

NIKOMAX NMF-2ZS-016A1C-BK 16 x SINGLE MODE 9/125 ITU-T G. 652.D & G. 657.A1 Hr(A)-HF - 40C DG23T 986M



	NMF-2ZS- xxx A1C-BK			
-	4	8	16	24
	9/125 (Single Mode)			
	ITU-T G.652.D & ITU-T G.657.A1			
	850 ± 25			
	2 x			
	(A)-HF			
	7	8,5	10,5	
/	44	48	82	102
	12,5 Ø			
	0,6			
	100 /c			
	-40 + 70 °C.		0 + 70 °C.	-40 + 70 °C.
	1			

	-				
NMF-2ZS-004A1C-BK	4	SM 9/125	(A)-HF	730 620	127,0
NMF-2ZS-008A1C-BK	8	SM 9/125	(A)-HF	830 620	195,0
NMF-2ZS-016A1C-BK	16	SM 9/125	(A)-HF	950 620	280,0
NMF-2ZS-024A1C-BK	24	SM 9/125	(A)-HF	950 620	290,0

	1310	1383*	1550	1625
/	0,4	0,36	0,25	0,25

*

	16	25	25	25
	1	100	100	100
	1550	1310	1550	1625
	0,05	0,05	0,05	0,05

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	