


NKL 5120A-GY - PVC,
 NKL 5120 -OR -LSZH,
 NIKOLAN UTP 25
 .3, 26AWG, , 16 , 305 500

✓ ISO/IEC 11801,
 EN 50173 TIA/EIA-568
 ✓

10 /c.
 NKL 5120A-GY - 25
 3
 NKL 5120 -OR - 25
 3

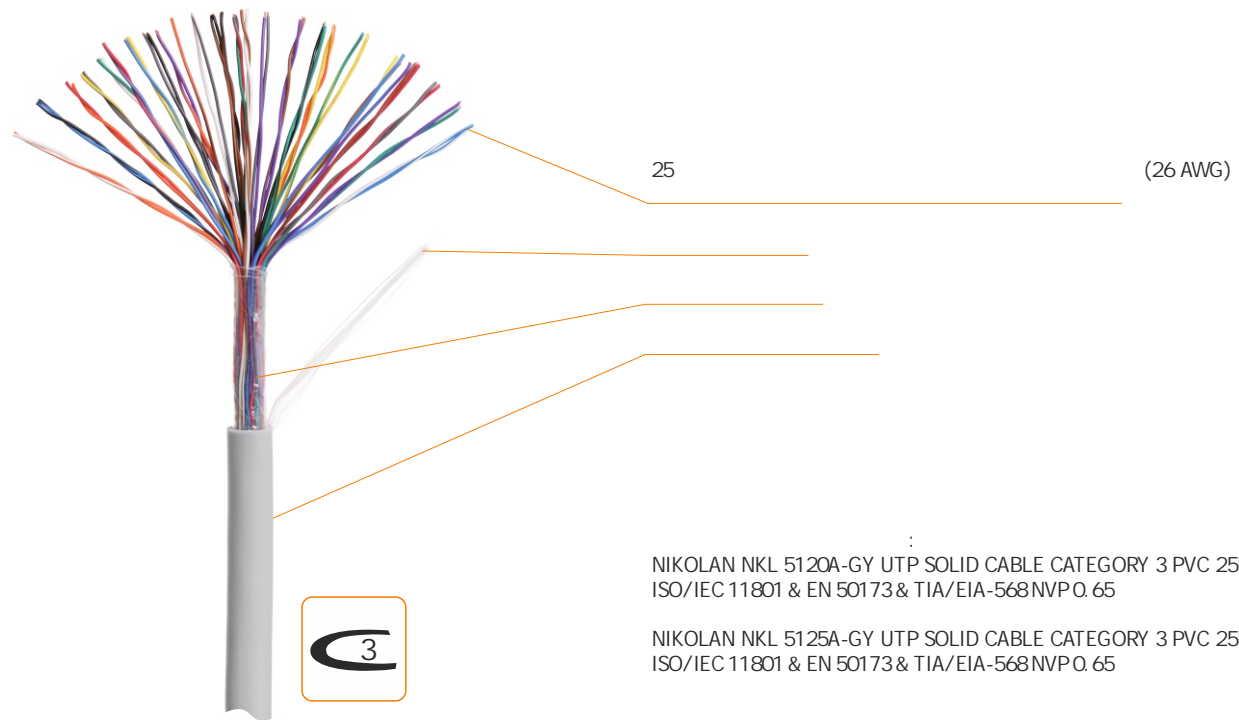

NKL 5120A-GY

NIKOLAN NKL 5120A-GY UTP SOLID CABLE CATEGORY 3 PVC 25P 26 AWG
 ISO/IEC 11801 & EN 50173 & TIA/EIA-568 NVPO.65

NIKOLAN NKL 5125A-GY UTP SOLID CABLE CATEGORY 3 PVC 25P 26 AWG
 ISO/IEC 11801 & EN 50173 & TIA/EIA-568 NVPO.65

	305
10 :	
NMC-PL10-CC-10, NMC-PL10-CU-10, NMC-PL10-DC-10, NMC-PL10-DU-10	
11Q:	
NMC-CB110-50NL, NMC-CB110-100NL, NMC-CB110-50L, NMC-CB110-100L	
11Q: NMC-RB110-100, NMC-RB110-200	
11Q: NMC-CC110UD4-100, NMC-CC110UD5-100	
5- 11Q: NMC-315DR	
: NMC-364OR	
- : NMC-14TA, NMC-14TBK	
: TCT-CVXXX-ZZ	
: NMC-SAT 20-20-WT, NMC-SAT 30-30-WT	



	NKL 5120A-GY	NKL 5120C-OR
		3
		16
		UTP
		25
		26 (0,405)
		(HDPE)
		0,15 ± 0,02
		0,71 ± 0,05
	(PVC)	LSZH
		/
		0,95 ± 0,05
		9,2 ± 0,3
		120 ± 1,0
		15
		10
		250
		1250
		100±15
	(NVP)	0,65
		95
		305
		ISO/IEC 11801, EN 50173 TIA/EIA-568
		10BASE-T, 100BASE-T4, ATM-25, ATM-51, TR-4
	0 +50 -20 +60 -20 +60	0 +70 -40 +70 -40 +70
		1

	-						3	
NKL 5120A-GY	25	3	UTP			305	0,0380	37,2
NKL 5120C-OR	25	3	UTP	/		305	0,0380	37,2

1	2	3	4	5
/ -	/ -	/ -	/ -	/ -
6	7	8	9	10
/ -	/ -	/ -	/ -	/ -
11	12	13	14	15
/ -	/ -	/ -	/ -	/ -
16	17	18	19	20
/ -	/ -	/ -	/ -	/ -
21	22	23	24	25
/ -	/ -	/ -	/ -	/ -