


CCA-UU002-5-PVC-GY - 305
 CCA-UU002-5-PVC-GY-5 - 500

U/UTP 2 , .5, , CCA,
 , PVC,

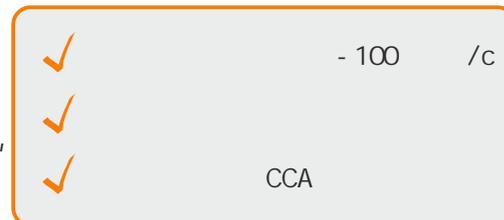


CCA-UU002-5-PVC-GY CCA-UU002-5-PVC-GY-5 2
 ().

100 / .
 305 500 .

5,



Оболочка из
 поливинилхлорида
 Проводники из
 омедненного алюминия
 Изоляция из полиэтилена
 высокой плотности
 Разрывная нить



NETLAN CCA-UU002-5-PVC-GY U/UTP SOLID CCA ETHERNET
 LAN CABLE 2P CATEGORY 5 PVC (Hr(B))



305 /500

	CCA-UU002-5-PVC-GY	CCA-UU002-5-PVC-GY-5
		5
		100
		U/UTP
		(CCA)
		0,50±0,01
		(HDPE)
		0,2 ± 0,02
		0,90 ± 0,03
		(PVC)
		()
		0,5 ± 0,01
		4,0 ± 0,2
		-
		14,6 ± 0,5
		8-
		4-
		80
		100 ± 15
		145
	305	500
		: TIA/EIA-568
		10BASE-T, 100BASE-TX
	-20 +60.	0 +50. -20 +60
		-
		1

CCA-UU002-5-PVC-GY	5	2	U/UTP	, PVC		305	0,018000	4,400
CCA-UU002-5-PVC-GY-5	5	2	U/UTP	, PVC		500	0,028749	7,600