


NMF-4IS- M3C-BK -2/4/8/12/16/24

NIKOMAX - , 50/125 , OMB,
/ , (A)-HF,

NMF-4IS-*xxx*M3C-BK / ,

ISO/IEC 11801 OM3.

(A)-HF.

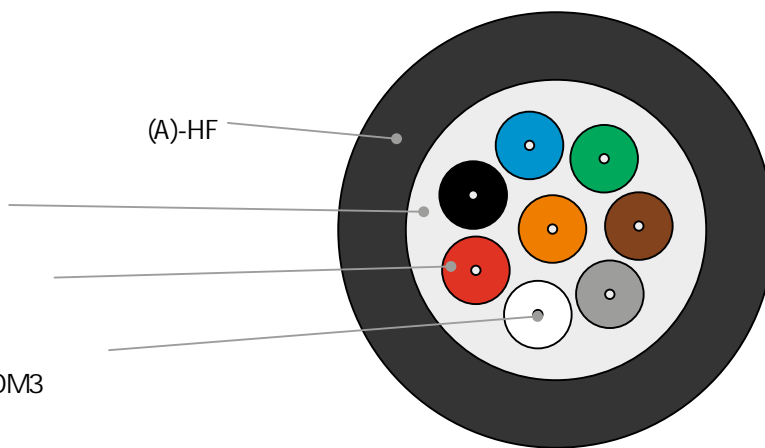

MM 50/125 OM3

NMF-4IS-008M3C-BK

8 / 50/125, OMB,
()-HF,

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Cyan	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Cyan

NIKOMAX NMF-4IS-008M3C-BK 8xMULTI MODE 50/125 ISO/IEC 11801 OM3 Hr(A)-HF *YYYYxxxM*
YYYY- , *xxx* -

2000 .

	NMF-4IS-xxxM3C-BK					
	2	4	8	12	16	24
	50/125 (Multi Mode)					
	ISO/IEC 11801 OM3					
	900 ± 25					
	(A)-HF					
	/					
	4,0 ± 0,2	4,9 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2
	/					
	15,0	18,0	27,0	36,0	55,0	65,0
	10 Ø					
	440			660		
	100 /c					
	-40 +70 °C.			0 +70 °C.		
	-40 +70 °C.					
(),	450x400	600x400		650x400	800x600	
	- 5 . 15 -			NIKOMAX		

	850	1300
	2,3	0,6

	15	15	37,5	37,5
	2	100	100	100
	850	1300	850	1300
	1,0	1,0	0,5	0,5

	-			3	
NMF-4IS-002M3C-BK	2	MM 50/125	(A)-HF	0,08	34
NMF-4IS-004M3C-BK	4	MM 50/125	(A)-HF	0,14	46
NMF-4IS-008M3C-BK	8	MM 50/125	(A)-HF	0,14	56
NMF-4IS-012M3C-BK	12	MM 50/125	(A)-HF	0,17	64
NMF-4IS-016M3C-BK	16	MM 50/125	(A)-HF	0,34	125
NMF-4IS-024M3C-BK	24	MM 50/125	(A)-HF	0,34	150