


NMF-4IS-**xxx**S2C-BK -2/4/8/12/16/24

NIKOMAX - , 9/125 , OS2,
/ , (A)-HF,

NMF-4IS-**xxx**S2C-BK /

ISO/IEC11801 OS2 ITU-T G.652.D.

(A)-HF.

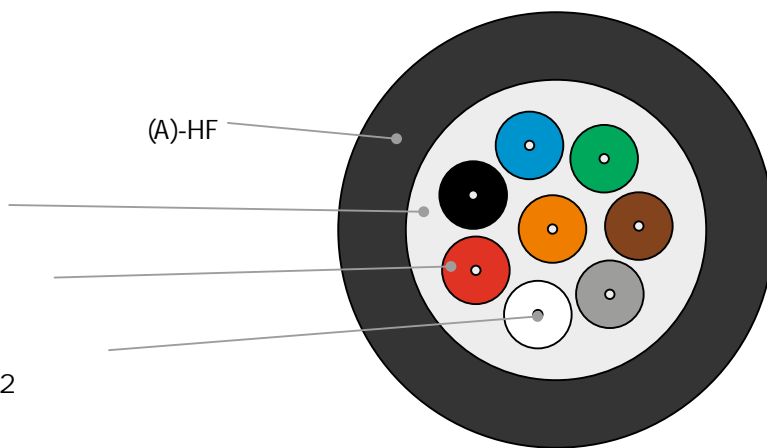

SM 9/125 OS2

NMF-4IS-008S2C-BK

8 / 9/125, OS2 & G.652 D,
()-HF,

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Light Blue	Dark Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Light Blue

NIKOMAX NMF-4IS-008S2C-BK 8x SINGLE MODE 9/125 ISO/IEC11801 OS2 & ITU-T G.652.D Hr(A)-HF **YYYYYxxxM**
YYYYY- , **xxx** -

2000 .

	NMF-4IS-xxS2C-BK					
	2	4	8	12	16	24
	9/125 (Single Mode)					
	ISO/IEC 11801 OS2 & ITU-T G.652.D					
	900 ± 25					
	(A)-HF					
	/					
	4,0 ± 0,2	4,9 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2
	/					
	15,0	18,0	27,0	36,0	55,0	65,0
	10 Ø					
	440			660		
	100 /c					
	-40 +70 °C.			0 +70 °C.		
	-40 +70 °C.					
()	450x400	600x400	650x400	800x600		
	-5 . 15 -			NIKOMAX		

	1310	1383*	1550	1625
	0,33	0,32	0,19	0,22

*

	16	25	25	25
	1	100	100	100
	1550	1310	1550	1625
	0,05	0,05	0,05	0,05

				3	
NMF-4IS-002S2C-BK	2	SM 9/125	(A)-HF	0,08	34
NMF-4IS-004S2C-BK	4	SM 9/125	(A)-HF	0,14	46
NMF-4IS-008S2C-BK	8	SM 9/125	(A)-HF	0,14	56
NMF-4IS-012S2C-BK	12	SM 9/125	(A)-HF	0,17	64
NMF-4IS-016S2C-BK	16	SM 9/125	(A)-HF	0,34	125
NMF-4IS-024S2C-BK	24	SM 9/125	(A)-HF	0,34	150