


NKL 8120A-GY - PVC,
 NKL 8120C-OR - LSZH,
 NIKOLAN UTP 10
 .3, 26AWG, , 16 , 305 500

✓ ISO/IEC 11801,
 EN 50173 TIA/EIA-568
 ✓

10 /c.
 NKL 8120A-GY - 10
 NKL 8120C-OR - 10

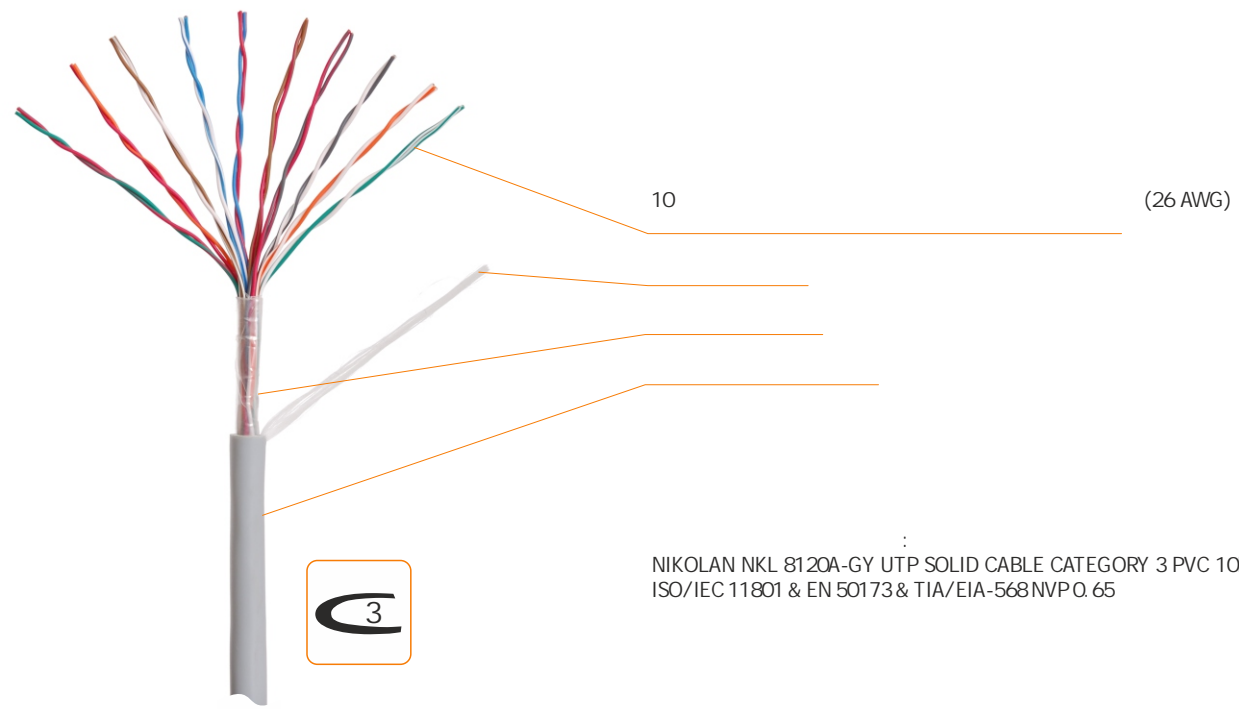

NIKOLAN NKL 8120A-GY UTP SOLID CABLE CATEGORY 3 PVC 10P 26AWG
 ISO/IEC 11801 & EN 50173& TIA/EIA-568 NVPO. 65

NKL 8120A-GY

	305	500
10 :		
NMC-PL10-CC-10, NMC-PL10-CU-10, NMC-PL10-DC-10, NMC-PL10-DU-10		
110:		
NMC-CB110-50NL, NMC-CB110-100NL, NMC-CB110-50L, NMC-CB110-100L		
110: NMC-RB110-100, NMC-RB110-200		
110: NMC-CC110UD4-100, NMC-CC110UD5-100		
: NMC-S501B		
5- 110: NMC-315DR		
: NMC-364OR		
- : NMC-14TA, NMC-14TBK		
: TCT-CVXXX-ZZ		
: NMC-SAT 20-20-WT, NMC-SAT 30-30-WT		



	NKL 8120A-GY	NKL 8120C-OR
		3
		16
		UTP
		10
		26 (0,405)
		(HDPE)
		0,15 ± 0,02
		0,71 ± 0,05
	(PVC)	LSZH
		/
		0,85 ± 0,05
		6,5 ± 0,3
		70 ± 1,0
		15
		10
		100
		500
		100±15
	(NVP)	0,65
		95
		305
		ISO/IEC 11801, EN 50173 TIA/EIA-568
		10BASE-T, 100BASE-T4, ATM-25, ATM-51, TR-4
	0 +50 -20 +60 -20 +60	0 +70 -40 +70 -40 +70
		380 240
		1

NKL 8120A-GY	10	3	UTP			305	0,0272	18,6
NKL 8120C-OR	10	3	UTP	/		305	0,0272	18,6