




ТАХИОН
ПРОИЗВОДСТВЕННАЯ ФИРМА


St2. X2. 1 ()
« »
St1
»: -10°
»: 0°

| St1 « » (t...) | t... | t... |
|-------------------|------|------|
| -30 | -33 | -24 |
| -25 | -28 | -19 |
| -20 | -23 | -14 |
| -15 | -18 | -9 |
| -10 | -13 | -4 |
| -5 | -8 | 1 |
| 0 | -3 | 6 |
| +5 | 2 | 11 |
| +10 | 7 | 16 |

| St2 « » (t...) | t... | t... |
|-------------------|------|------|
| -30 | -33 | -24 |
| -25 | -28 | -19 |
| -20 | -23 | -14 |
| -15 | -18 | -9 |
| -10 | -13 | -4 |
| -5 | -8 | 1 |
| 0 | -3 | 6 |
| +5 | 2 | 11 |
| +10 | 7 | 16 |

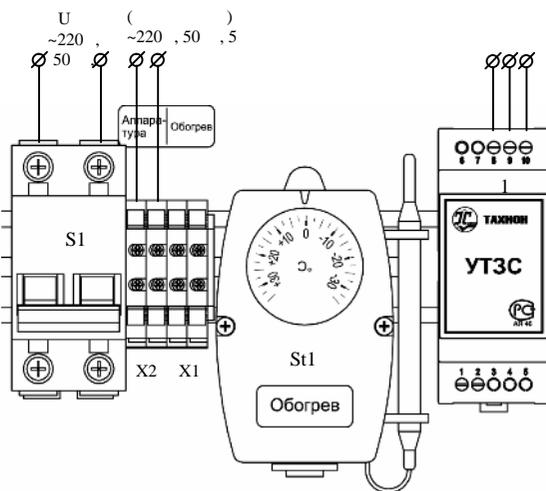

St1
+25° ± 3°
8, 9 10
+15° ± 5°
70°
3 (R1, R2)

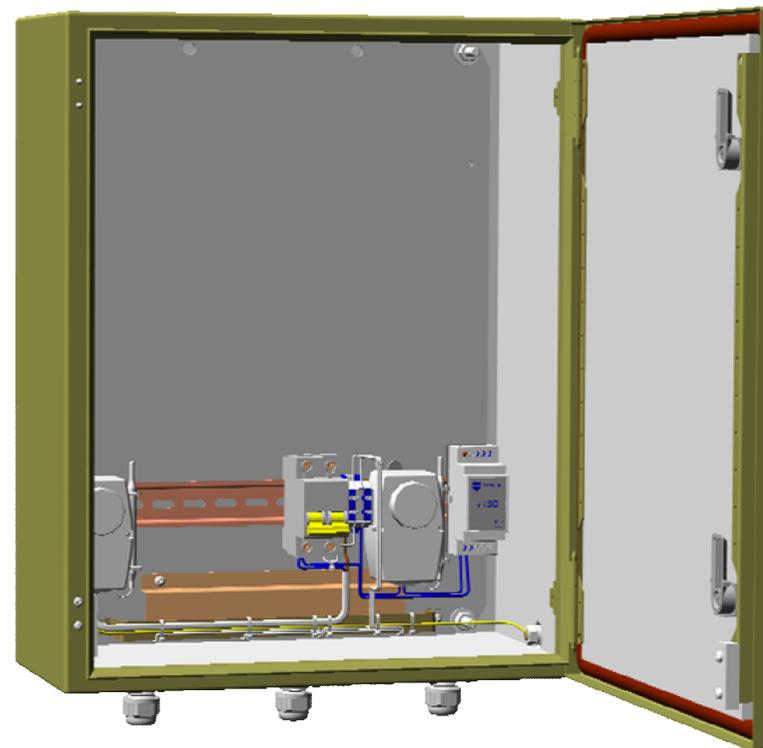

-3

.422412.003



RU. 46. 16516

194044,
(812) 327-1247, 327-1298, 327-1201, 327-1153 10.00 17.00
www.tahion.spb.ru

E-mail: info@tahion.spb.ru

-3()

St1 « » ()
St1.

-3

St2

1.5 15150-69. IP 65.

- 1.1 ; 3.1 ;
- 2.1 ; 4.1 ;


- 1. : U-220 ±15%, 50
- 2. :-220 ±15%, 50
- 3.75
- 4.-53° ÷ +50° ;
- 5. ()-30° ÷ +22° ;
- 6.+25° ± 3° ;
- 7. ()-30° ÷ +30° ;
- 8. ()400 500 210
- 9.360 310 180
-13,6

-3:

- 1.
- 2.
- 3.
- 4.


(. .1-3)

3. S1.

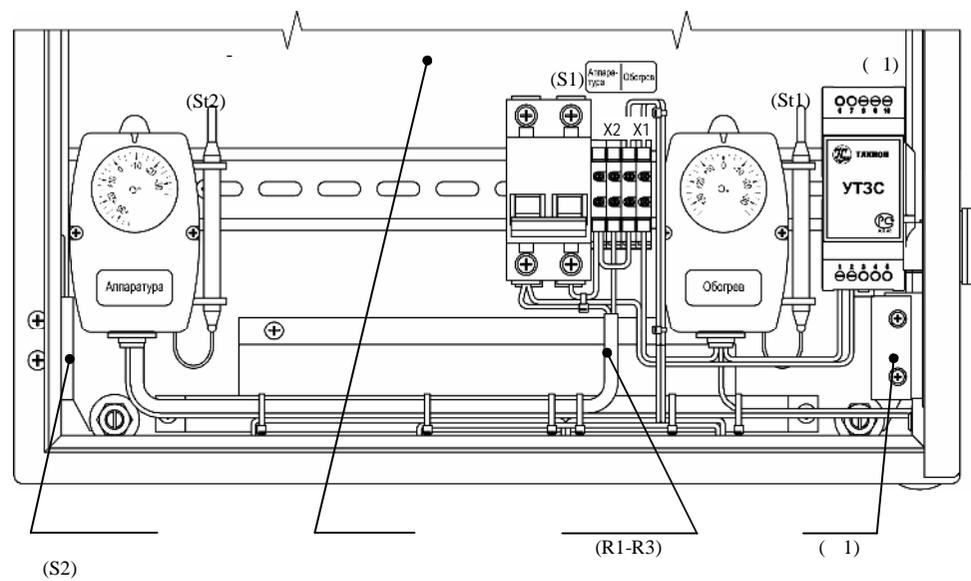

(S2) (R1-R3) (1)

.1. (90°)

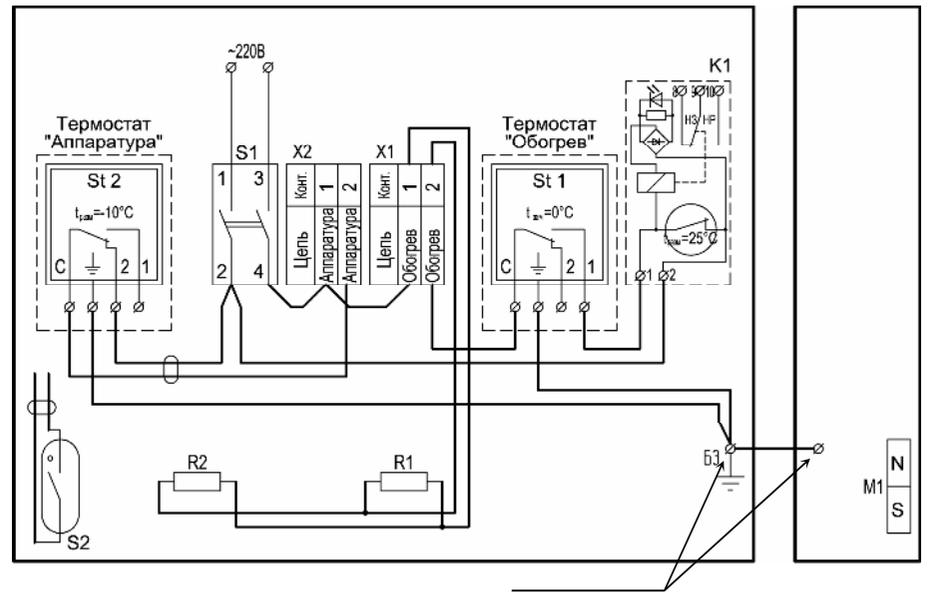

.2