

# EC-PC4UE55B-BC-PVC-**xxx**-GY-10

NETLAN U/UTP

4 , .6( E), 250 ,  
2 RJ45/8P8C, T568B,

10 .  
( - )




EC-PC4UE55B-BC-PVC-**xxx**-GY-10

6,

T568B.

RJ45/8P8C.

NETLAN

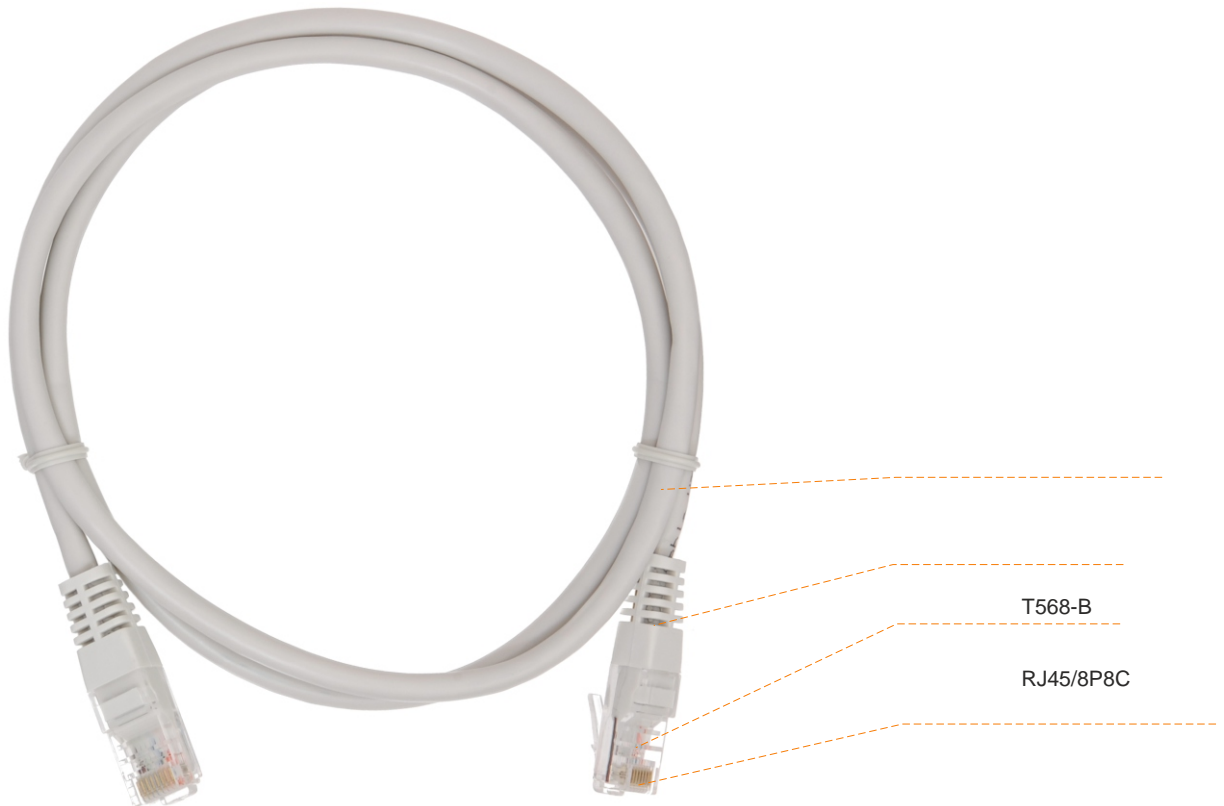

EC-PC4UE55B-BC-PVC-**xxx**-GY-10

**xxx** — (005 — 0,5 , 010 — 1 , ...)

	EC-PC4UE55B-BC-PVC-XXX-GY-10
	6
	250
	UTP
	4
	26 AWG (7 0,160 ± 0,1 )
	2xRJ45/8P8C
	3
	T568B
	(PE)
	(PVC)
	5,5 ± 0,3
	: ISO/IEC 11801, EN 50173 TIA/EIA-568
	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	- -20 +60 - -20 +50
	1
	- 10

					C <sub>3</sub>	
EC-PC4UE55B-BC-PVC-003-GY-10	6		0,3	10	0,0015	0,10
EC-PC4UE55B-BC-PVC-005-GY-10	6		0,5	10	0,0018	0,13
EC-PC4UE55B-BC-PVC-010-GY-10	6		1	10	0,0023	0,22
EC-PC4UE55B-BC-PVC-015-GY-10	6		1,5	10	0,0025	0,30
EC-PC4UE55B-BC-PVC-020-GY-10	6		2	10	0,0030	0,45
EC-PC4UE55B-BC-PVC-030-GY-10	6		3	10	0,0038	0,70
EC-PC4UE55B-BC-PVC-050-GY-10	6		5	10	0,0057	1,00
EC-PC4UE55B-BC-PVC-100-GY-5	6		10	5	0,0090	1,98